

Model No.: HD-P011603

LD3/LD1,LD2 CONTAINER DOLLY



Model No.: HD-P011603

LD3/LD1,LD2 CONTAINER DOLLY

FEATURES:

- *ULD to handle : LD3, LD1/LD2 container.
- *Front bearing turntable(fifth wheel) steering.
- *Easy hand control stops (LD2 container stops option)
- *360 degree rotation turntable can stop at any 90 or 180 degree position.
- *Foot pedal control turntable position pin, easy, efficient and less maintenance design.
- *Brake works when towbar is at freely down position, which increase much the safety when the dolly is running
- *Heavy duty 76mm dia. roller.
- *Lead-in rollers at both ends ensure easily loading/unloading.
- *E-shape spring loaded safe tow hitch.
- *Heavy duty frame with high quality steel and flux core MIG welding.
- *Easy maintenance jobs.
- *Hot dip galvanizing.

SPECIFICATION:

- *Overall dimensions (LxWxH): 3500mm x 1770mm x 560mm
- *Working flat dimensions(LxWxH):1915mm x 1554mm x 520mm
- *Capacity: 1600kgs
- *Tyres: 15x4.5-8 super elastic solid rubber tyres.
- *Weight: 720kgs
- *Maximum towing speed:25km/h.



Model No.: HD-P011604

LD3/LD1,LD2 CONTAINER DOLLY



Model No.: HD-P011604

LD3/LD1,LD2 CONTAINER DOLLY

FEATURES:

- *ULD to handle : LD3, LD1/LD2 container.
- *Front bearing turntable(fifth wheel) steering.
- *Easy hand control stops (LD2 container stops option)
- *360 degree rotation turntable can stop at any 90 or 180 degree position.
- *Foot pedal control turntable position pin, easy, efficient and less maintenance design.
- *Brake works when towbar is at upright position or freely down position, which increase much the safety when the dolly is running.
- *Heavy duty 76mm dia. roller.
- *Lead-in roller at the ends for easily loading/unloading.
- *Infls between rollers ensure operator's safety.
- *E-shape spring loaded safe tow hitch.
- *Heavy duty frame with high quality steel and flux core MIG welding.
- *Easy maintenance jobs.
- *Hot dip galvanizing.

SPECIFICATION:

- *Overall dimensions (LxWxH): 3666mm x 1860mm x 568mm
- *Working flat dimensions(LxWxH):1910mm x 1860mm x 520mm
- *Capacity: 1600kgs
- *Tyres: 15x4.5-8 super elastic solid rubber tyres.
- *Weight: 750kgs
- *Maximum towing speed:25km/h.



www.handlingyumbo.com
info@handlingyumbo.com

Model No.: HD-P011606

LD3/LD1,LD2 CONTAINER DOLLY

Model No.: HD-P011606

LD3/LD1,LD2 CONTAINER DOLLY

FEATURES:

- *ULD to handle: LD3, LD1/LD2 container
- *Front bearing turntable(fifth wheel) steering.
- *Easy manual control stops.
- *360 degree rotation turntable can stop at any 90 or 180 degree position.
- *Foot pedal control turntable position pin.
- *Brake works when towbar is at upright position or freely down position, which increase much the safety when the dolly is running.
- *Heavy duty 76mm dia. roller.
- *Lead-in roller at the ends for easily loading and unloading
- *E-shape spring loaded safe tow hitch.
- *Heavy duty frame with high quality steel and flux core MIG welding.
- *Easy maintenance jobs.
- *Hot dip galvanizing.

SPECIFICATION:

- *Overall dimensions (LxWxH): 3520mm x 1770mm x 563mm
- *Working flat dimensions(LxWxH):2216mm x 1770mm x 518mm
- *Capacity: 1600kgs
- *Tyres: 15x4.5-8 super elastic solid rubber tyres.
- *Weight: 720kgs
- *Maximum towing speed:25km/h.



www.handlingyumbo.com
info@handlingyumbo.com

Número de modelo: HD-P011609

CARRO CONTENEDOR LD3/LD1,LD2,LD8

Número de modelo: HD-P011609

CARRO CONTENEDOR LD3/LD1,LD2,LD8

Características

- *ULD para manipular: Contenedor LD3/LD1,LD2 o LD8
- * Dirección de la plataforma giratoria del cojinete delantero (quinta rueda).
- * Paradas de fácil control manual.
- * El plato giratorio de rotación de 360 grados puede detenerse en cualquier posición de 90 o 180 grados.
- * Pasador de posición de la plataforma giratoria de control del pedal.
- * El freno funciona cuando la barra de remolque está en posición vertical
- * Servicio pesado de 76 mm de diámetro, rodillo.
- * Rodillo de entrada en los extremos para facilitar la carga y descarga
- * Enganche de remolque seguro con resorte en forma de E.
- * Estructura resistente con acero de alta calidad y soldadura MIG con núcleo fundente.
- * Trabajos de fácil mantenimiento.
- * Galvanizado en caliente para opcional.

Especificación:

- * Dimensiones generales (LxAnxAl): 4320 mm x 1860 mm x 561 mm
- * Dimensiones planas de trabajo (LxWxH): 3000 mm x 1660 mm x 516 mm
- * Capacidad: 2500kg
- * Neumáticos: 400-8 neumáticos de caucho macizo superelásticos.
- * Peso: 913kg
- * Velocidad máxima de remolque: 30 km/h.



www.handlingyumbo.com
info@handlingyumbo.com

Model No.: HD-P011609

LD3/LD1,LD2,LD8 CONTAINER DOLLY



Model No.: HD-P011609

LD3/LD1,LD2 , LD8 CONTAINER DOLLY

FEATURES:

- *ULD to handle: LD3/LD1,LD2 or LD8 container
- *Front bearing turntable(fifth wheel) steering.
- *Easy manual control stops.
- *360 degree rotation turntable can stop at any 90 or 180 degree position.
- *Foot pedal control turntable position pin.
- *Brake works when towbar is at upright position
- *Heavy duty 76mm dia. roller.
- *Lead-in roller at the ends for easily loading and unloading
- *E-shape spring loaded safe tow hitch.
- *Heavy duty frame with high quality steel and flux core MIG welding.
- *Easy maintenance jobs.
- *Hot dip galvanizing for optional.

SPECIFICATION:

- *Overall dimensions (LxWxH): 4320mm x 1860mm x 561mm
- *Working flat dimensions(LxWxH):3000mm x 1660mm x 516mm
- *Capacity: 2500kgs
- *Tyres: 400-8 super elastic solid rubber tyres.
- *Weight: 913kgs
- *Maximum towing speed:30km/h.



www.handlingyumbo.com
info@handlingyumbo.com

Model No.: HD-P011610

2 x LD1/LD3,LD8,LD11 CONTAINER DOLLY



Model No.: HD-P011610


2 x LD1/LD3,LD8,LD11 CONTAINER DOLLY

FEATURES:

- *ULD to handle: 2 X LD3 or 2 x LD1, 1 X LD8, 1XLD11 container
- *Front bearing turntable(fifth wheel) steering.
- *Easy manual control stops.
- *Brake works when towbar is at upright position
- *Heavy duty 76mm dia. roller.
- *Lead-in roller at the ends for easily loading and unloading
- *E-shape spring loaded safe tow hitch.
- *Heavy duty frame with high quality steel and flux core MIG welding.
- *Easy maintenance jobs.
- *Hot dip galvanizing.

SPECIFICATION:

- *Overall dimensions (LxWxH): 5252mm x 1690mm x 564mm
- *Working flat dimensions(LxWxH):3280mm x 1690mm x 564mm
- *Capacity: 2500kgs
- *Tyres: 400-8 super elastic solid rubber tyres.
- *Weight: 750kgs
- *Maximum towing speed:30km/h.

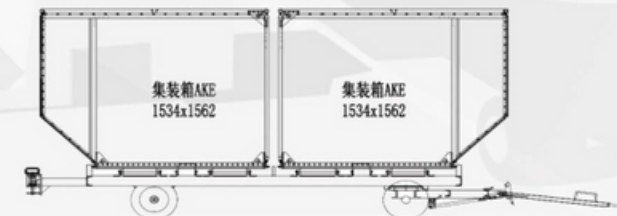

www.handlingyumbo.com
info@handlingyumbo.com